

PERFORMANCE

A BUCKET

The buckets are thickened and detachable, and different buckets can be replaced according to the environment.

B PROTECTIVE PLATE

The upper side of the cylinder is equipped with a mounting plate and a guard plate to prevent the goods from falling and hitting the cylinder, which will aggravate the wear and damage of the cylinder.

C OIL WINDOW

The oil tank is equipped with a hydraulic oil window, which can effectively observe the state of the hydraulic oil and replace the hydraulic oil in time.

D TRACK WHEELS

The rollers and guide wheels adopt double bearings and double support retaining rings, and spacers are installed to prevent foreign objects from entering the interior, aggravate wear, and ensure the service life of the wheels.



A LIFTING DEVICE CAN BE ADDED
(the standard model does not have a lifting device).

EASY TO OPERATE AND MAINTAIN

The shroud is semi-wrapped, which effectively isolates heat, and has a more beautiful appearance. The large air vent ensures the intake of the engine and the exhaust of hot air in the cabin.

Use Briggs & Stratton single-cylinder engine 2100, with large torque, high speed, electronic control, and double start by hand.

The high-quality engineering rubber shock absorber is adopted, with good shock absorption effect, and the thickness of the engine bottom plate is up to 10mm.



The walking lever is an operating lever, and a single lever can realize forward, backward, steering and other actions, which is convenient for operation, and has high and low speed functions.

The upper side of the gear pump is equipped with a protective plate to prevent the gear pump and oil pipe from being damaged due to falling cargo. Reduce maintenance times and ensure the stability of power output.

The pedals can be folded and turned upside down, effectively saving space. There are anti-skid holes on the surface, and edge guards are installed around them to prevent slipping and falling accidents during work.

PRODUCT DETAILS



Bucket



The retractable bucket design ensures that items enter the compartment and improves work efficiency

EXHAUST VENT



The exhaust port is located on the side of the machine, effectively preventing the random discharge of exhaust gas

PROTECTIVE COVER



Installing a protective cover can effectively prevent the engine from overheating and damage the driver

HYDRAULIC CYLINDER



Split-pipe operation with multiple hydraulic cylinders for compound action

ENGINE




Using the brand engine, it runs smoothly and has strong power

BUTTER SPOUT



Grease nipple with central lubrication

■ SCOPE OF WORK

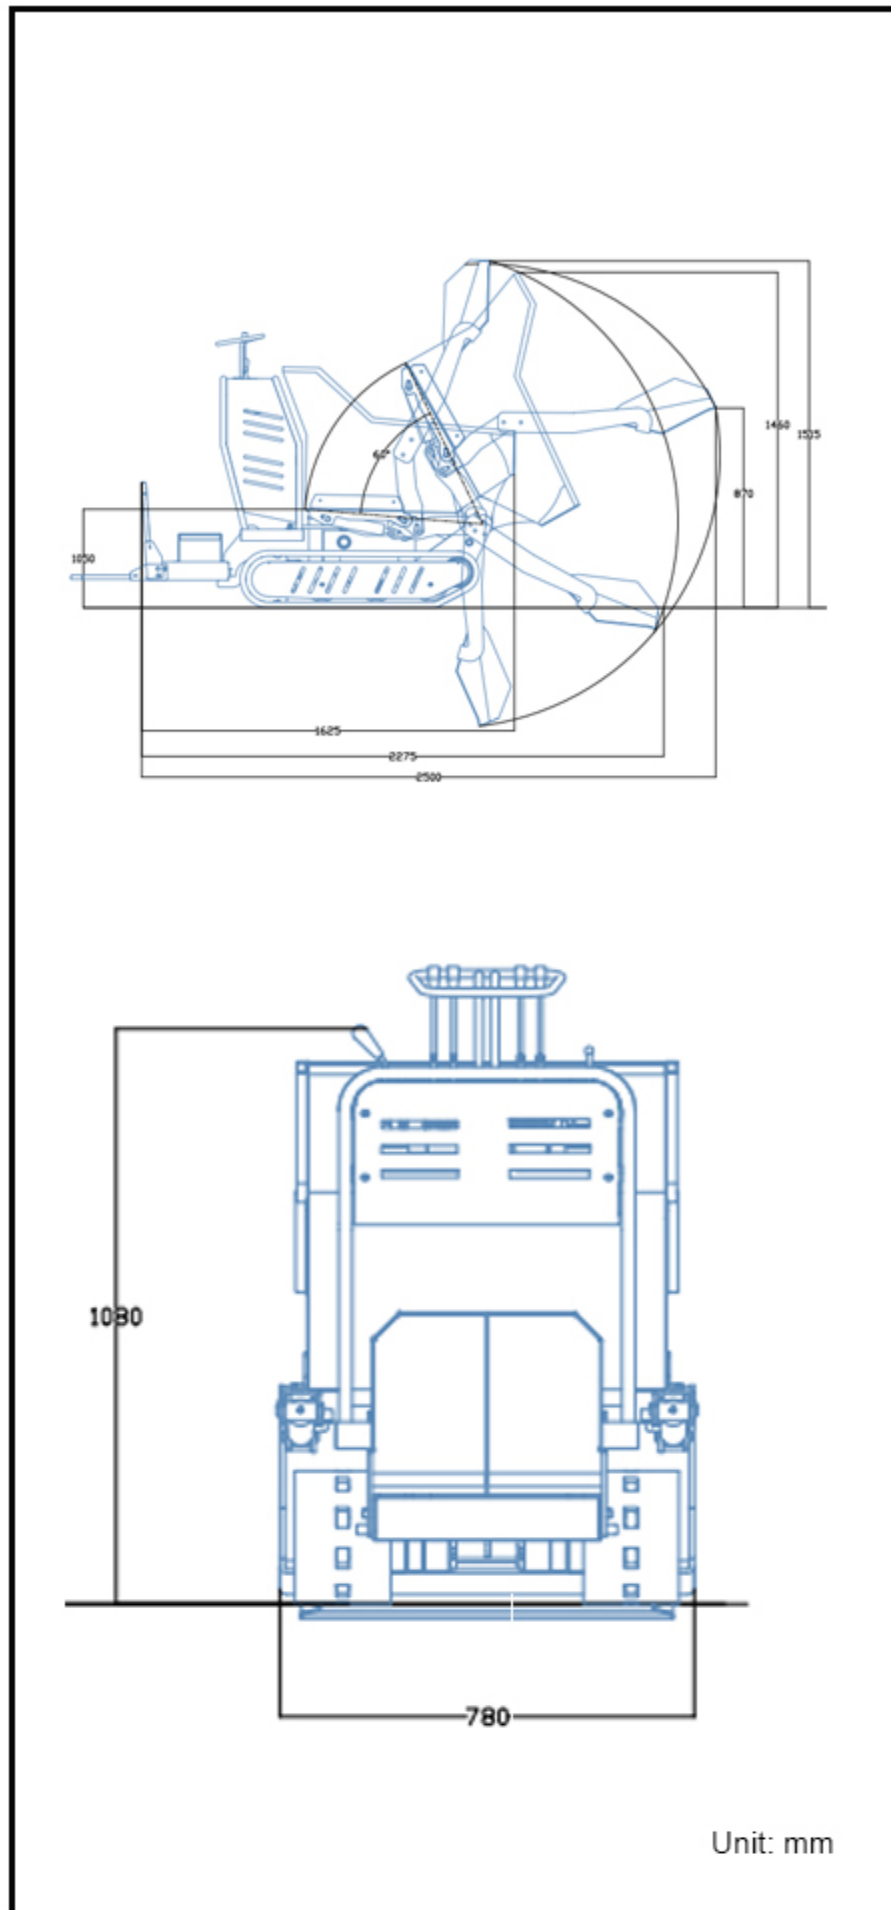

■ SPECIFICATION

	Model	Unit	RD06
Basic parameters	Machine operating weight	lb (kg)	1043 (473)
	Bucket capacity	ft ³ (m ³)	1.06 (0.03)
	Dump capacity	ft ³ (m ³)	9.5 (0.27)
	Rated load mass	lb (kg)	770 (350)
	Travel speed low/high speed	mph (km/h)	0-1.24/0-2.48(0-2/0-4)
	Gradability	%	30%
	Ground pressure	psf (kpa)	408.4 (19.55)
	Maximum unloading height	in (mm)	14 (356)
	Maximum unloading distance	in (mm)	10.7 (272)
	Minimum ground clearance	in (mm)	2.8 (70)
Engine	Engine brand	in (mm)	Briggs & Stratton
	Engine model		XR2100
	Maximum horsepower	(ps)	13.6
	Maximum power	hp(kw)	11.2 (8.4)
	Maximum speed	(rpm)	3600
	Displacement	gal (L)	0.11 (0.42)
	Number of cylinders		1
	Cooling method		Air-cooled
	Engine oil change amount	gal (L)	0.32 (1.2)
	Fuel form		Gasoline
	Fuel grade		92#
	Theoretical fuel consumption		0.8-1.2
Body	Transport length	in (mm)	65.7(1670)
	Transport width	in (mm)	30.7 (780)
	Transport height	in (mm)	47.2 (1200)
	Bucket width	in (mm)	27.6 (700)

■ HYDRAULIC SYSTEM

Main pump type/model	Gear pump PGP51044SLP	Multi-way valve brand	Tengfei
Main pump brand	Tianjin Walking	Rated set pressure (Mpa)	16MPa
Main pump maximum flow (L/min)	14.4+14.4	Maximum set pressure (Mpa)	18MPa
Multi-way valve - left	Double multi-way valve	Travel hydraulic motor type	Deston BM5-200
Multi-way valve brand	Tengfei	Travel motor brand	Deston
Multi-way valve - right	Double multi-way valve	Motor displacement	200

- Before operation, thoroughly inspect the tracks and chassis to ensure maneuverability.
- Operate smoothly and control steering, avoiding sharp turns that could damage the ground and tracks.
- Strictly adhere to loading regulations, utilizing the advantages of tracks while still preventing overloading.
- Lift and unload on firm, level ground to fully leverage track stability.
- Transportation and transfer must be carried out according to regulations; tracked vehicles are not highway vehicles.
- After operation, promptly clean and maintain the vehicle, paying particular attention to the running gear.